

fujimak

Electric Combi Oven FSCCWE Series



FSCCWE 61




FSCCWE 62



FSCCWE 101



FSCCWE 102

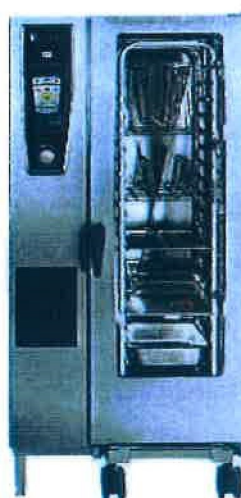

FSCCWE 201



FSCCWE 202

Model	Overall Dimension(mm)			Voltage	Total Power Consumption (kW)	Water inlet Connection Dim.	Drainage Connection Dim.	Quantity of Shelves	Product Weight (kg)
	W	D	H						
FSCCWE 61	847	771	782	3P400V	10.1	20A	Ø50	1/1x6layer	110.0
FSCCWE 62	1069	971	782	3P400V	20.7	20A	Ø50	2/1x6layer 1/1x12pcs	142.5
FSCCWE 101	847	771	1042	3P400V	17.2	20A	Ø50	1/1x10layer	135.5
FSCCWE 102	1069	971	1042	3P400V	34.0	20A	Ø50	2/1x10layer 1/1x20pcs	182.0
FSCCWE 201	879	791	1782	3P400V	34.3	20A	Ø50	1/1x20layer	258.0
FSCCWE 202	1084	996	1782	3P400V	62.3	20A	Ø50	2/1x20layer 1/1x40pcs	332.0

Temperature Adjustable Range: 30~300°C

香港及澳門代理商
Agent of HK & Macau

ANEL

APEX NOBLE EQUIPMENT LTD.

雅麗盈設備有限公司

香港荃灣柴灣角街95號華俊工業中心18樓05號室

Flat 5, 18/F, Wah Chun Industrial Centre,

95 Chai Wan Kok Street, Tsuen Wan, New Territories, Hong Kong

Mobile: 852-94505051, 853-62839652, 86-14715675669

Tel: 852-36901333, 36901338. Fax: 852-36901339


Website: www.anel.com.hk

fujimak


Electric Combi Oven FSCCMP Series



FCCMP 61




FCCMP 62




FCCMP 101



FCCMP 102

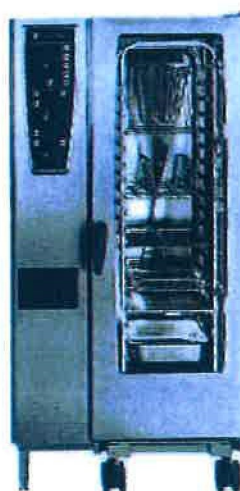

FCCMP 201

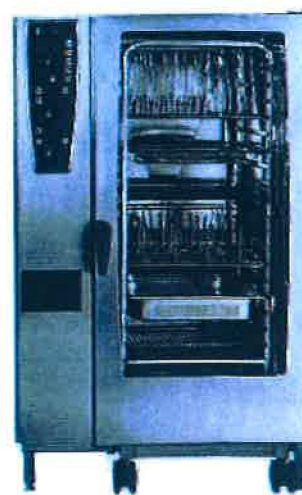

FCCMP 202

Model	Overall Dimension(mm)			Voltage	Total Power Consumption (kW)	Water inlet Connection Dim.	Drainage Connection Dim.	Quantity of Shelves	Product Weight (kg)
	W	D	H						
FCCMP 61	847	771	782	3P400V	10.1	20A	Ø50	1/1x6layer	99.0
FCCMP 62	1069	971	782	3P400V	20.7	20A	Ø50	2/1x6layer 1/1x12pcs	133.0
FCCMP 101	847	771	1042	3P400V	17.2	20A	Ø50	1/1x10layer	124.5
FCCMP 102	1069	971	1042	3P400V	34.0	20A	Ø50	2/1x10layer 1/1x20pcs	175.5
FCCMP 201	879	791	1782	3P400V	34.3	20A	Ø50	1/1x20layer	251.5
FCCMP 202	1084	996	1782	3P400V	62.3	20A	Ø50	2/1x20layer 1/1x40pcs	326.0

香港及澳門代理商
Agent of HK & Macau

ANEL

APEX NOBLE EQUIPMENT LTD.

雅麗盈設備有限公司

香港荃灣柴灣角街95號華俊工業中心18樓05號室

Flat 5, 18/F, Wah Chun Industrial Centre,

95 Chai Wan Kok Street, Tsuen Wan, New Territories, Hong Kong

Mobile: 852-94505051, 853-62839652, 86-14715675669

Tel: 852-36901333, 36901338. Fax: 852-36901339

Website: www.anel.com.hk

Temperature Adjustable Range: 30~300°C